



CellAdvisor™

JD748B Signal Analyzer Specifications



Spectrum Analyzer (Standard)

Frequency		
Frequency range	100 kHz to 4 GHz	
Internal 10 MHz Frequency Reference		
Accuracy	±0.05 ppm + aging (0 to 50°C)	
Aging	±0.5 ppm/year	
Frequency Span		
Range	0 Hz (zero span) 10 Hz to 4 GHz	
Resolution	1 Hz	
Resolution Bandwidth (RBW)		
–3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Video Bandwidth (VBW)		
–3 dB bandwidth	1 Hz to 3 MHz	1-3-10 sequence
Accuracy	±10% (nominal)	
Single Sideband (SSB) Phase Noise		
Fc 1 GHz, RBW 10 kHz, VBW 1 kHz, RMS detector		
Carrier Offset		
30 kHz	<–90 dBc/Hz (typical)	
100 kHz	<–95 dBc/Hz (typical)	
1 MHz	<–102 dBc/Hz (typical)	
Measurement Range		
DANL to +20 dBm		
Input attenuator range	0 to 50 dB, 5 dB steps	
Maximum Input Level		
Average continuous power	+20 dBm	
DC voltage	±50 V DC	

Spectrum Analyzer: 100 kHz to 4 GHz

Power Meter: 10 MHz to 4 GHz

Specification Conditions

JD748B specifications apply under these conditions:

- The instrument has been turned on for at least 15 minutes
- The instrument is operating within a valid calibration period
- Data with no tolerance are considered typical values
- Cable and antenna measurements apply after calibration to the OSL standard
- Typical and nominal values are defined as:
 - Typical: expected performance of the instrument operating at 20 to 30°C after being at this temperature for 15 minutes
 - Nominal: a general, descriptive term or parameter

Displayed Average Noise Level (DANL)		
1 Hz RBW, 1 Hz VBW, 50 Ω termination, 0 dB attenuation, RMS detector		
Preamplifier Off		
10 MHz to 2.3 GHz	–140 dBm (–146 dBm, typical)	
>2.3 GHz to 3 GHz	–138 dBm (–144 dBm, typical)	
>3 GHz to 4 GHz	–135 dBm (–140 dBm, typical)	
Preamplifier On		
10 MHz to 2.3 GHz	–155 dBm (–160 dBm, typical)	
>2.3 GHz to 3 GHz	–153 dBm (–158 dBm, typical)	
>3 GHz to 4 GHz	–150 dBm (–156 dBm, typical)	
Display Range		
Log scale and units (10 divisions displayed)	1 to 20 dB/division in 1 dB steps dBm, dBV, dBmV, dB μ V	
Linear scale and units (10 divisions displayed)	V, mV, mW, W	
Detectors	Normal, positive peak, sample, negative peak, RMS	
Number of traces	6	
Trace functions	Clear/write, maximum hold, minimum hold, capture, load view on/off, trace math	
Total Absolute Amplitude Accuracy		
Preamplifier off, power level >–50 dBm, auto-coupled (20 to 30°C)		
5 MHz to 4 GHz	± 1.25 dB, ± 0.5 dB (typical)	Attenuation <40 dB
	± 1.55 dB, ± 1.0 dB (typical)	Attenuation ≥ 40 dB
Reference Level		
Setting range	–120 to +100 dBm	
Setting Resolution		
Log scale	0.1 dB	
Linear scale	1% of reference level	
Markers		
Marker types	Normal, delta, delta pair, noise, frequency count marker	
Number of markers	6	
Marker functions	Peak, next peak, peak left, peak right, minimum search marker to center/start/stop, always peak on/off	
RF Input VSWR		
20 MHz to 4 GHz	1.5:1 (typical)	
Second Harmonic Distortion		
Mixer level	–25 dBm	
10 MHz to 1.3 GHz	<–65 dBc (typical)	
>1.3 GHz to 4 GHz	<–70 dBc (typical)	
Third-Order Inter-Modulation (third-order intercept: TOI)		
200 MHz to 2 GHz	+10 dBm (typical)	
>2 GHz to 4 GHz	+12 dBm (typical)	

Spurious		
Inherent residual response		
Input terminated, 0 dB attenuation, preamplifier off, RBW at 10 kHz, Sweep mode		
20 MHz to 3 GHz	−90 dBm (nominal)	
>3 GHz to 4 GHz	−85 dBm (nominal)	
Exceptions	<−70 dBm at 227.88/770.4/1791.8/2647.8/2927.3/3195.2/3915.1/3640 MHz	
Input-related spurious	<−67 dBc (nominal)	
Dynamic Range		
2/3 (TOI-DANL) in 1 Hz RBW	>95 dB	
Sweep Time		
Range	80 ms to 1000 s 24 μs to 200 s	Span = 0 Hz (zero span)
Accuracy	±2%	Span = 0 Hz (zero span)
Mode	Continuous, single	
Gated Sweep		
Trigger source	External, video, and GPS	
Gate length	1 μs to 100 ms	
Gate delay	0 to 100 ms	
Trigger		
Trigger source	Free run, video, external	
Trigger Delay		
Range	0 to 200 s	
Resolution	6 μs	
Measurements*		
Channel power		
Occupied bandwidth		
Spectrum emission mask		
Adjacent channel power		
Spurious emissions		
Field strength		
AM/FM audio demodulation		
Route map		
PIM detection		
Dual spectrum		

* CW signal generator (Option 003) can be set up simultaneously.

RF Power Meter (standard)

General Parameters			
Display range	–100 to +100 dBm		
Offset range	0 to 60 dB		
Resolution	0.01 dB or 0.1 x W (x = m, u, p)		
Internal RF Power Sensor			
Frequency range	10 MHz to 4 GHz		
Span	1 kHz to 100 MHz		
Dynamic range	–120 to +20 dBm		
Maximum power	+20 dBm		
Accuracy	Same as spectrum analyzer		
External RF Power Sensors			
Directional	JD731B	JD733A	
Frequency range	300 MHz to 3.8 GHz	150 MHz to 3.5 GHz	
Dynamic range	0.15 to 150 W (average) 4 to 400 W (peak)	0.1 to 50 W (average) 0.1 to 50 W (peak)	
Connector type	Type-N female on both ends		
Measurement type	Forward/reverse average power, forward peak power, VSWR		
Accuracy	±(4% of reading + 0.05 W) ^{1,2}		
Terminating	JD732B	JD734B	JD736B
Frequency range	20 MHz to 3.8 GHz		
Dynamic range	–30 to +20 dBm		
Connector type	Type-N male		
Measurement type	Average	Peak	Average and peak
Accuracy	±7% ¹		

Optical Power Meter (standard)


Optical Power Meter		
Display range	-100 to +100 dBm	
Offset range	0 to 60 dB	
Resolution	0.01 dB or 0.1 mW	
External Optical Power Sensors		
	MP-60A	MP-80A
Wavelength range	780 to 1650 nm	
Max permitted input level	+10 dBm	+23 dBm
Connector input	Universal 2.5 and 1.25 mm	
Accuracy	±5%	

1. CW condition at 25°C $\pm 10^\circ\text{C}$

2. Forward power

2-Port Transmission Measurements (Option 001)

Frequency	
Frequency range	5 MHz to 4 GHz
Frequency resolution	10 kHz
Transmission uncertainty	

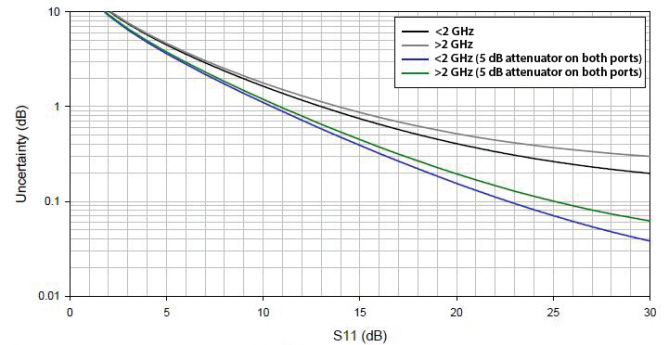

Use 5 dB attenuators on both ports to lessen uncertainty.

Output Power	
High	0 dBm (typical)
Low	–30 dBm (typical)
Dynamic Range	
Scalar	5 MHz to 4 GHz, >100 dB
Measurements	
Insertion Loss/Gain	
Range	–120 to 100 dB
Resolution	0.01 dB

CW Signal Generator (Option 003)

Frequency	
Frequency range	25 MHz to 4 GHz
Frequency reference	±25 ppm Maximum
Frequency resolution	10 kHz
Output Power	
Range	0 dBm, -30 to -80 dBm
Step	1 dB
Accuracy	±1.5 dB, (0 dBm, -30 to -60dBm) ± 2.5 dB (-60 to -80 dBm) (15 to 35°C)

GPS Receiver and Antenna (Option 010)

GPS Indicator		
Latitude, longitude, altitude		
High-Frequency Accuracy		
Spectrum, interference, and signal analyzer		
GPS lock	±25 ppb	
Hold over (for 3 days)	±50 ppb (0 to 50°C)	15 minutes after satellite locked
Connector	SMA, female	

Interference Analyzer (Option 011)

Measurements	
Spectrum analyzer	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
Spectrogram	Collect up to 72 hours of data
RSSI	Collect up to 72 hours of data
Interference finder	
Spectrum replay	
Dual spectrogram	

Channel Scanner (Option 012)

Frequency Range	
10 MHz to 4 GHz	
Measurement Range	
110 to +20 dBm	
Measurements	
Channel scanner	1 to 20 channels
Frequency scanner	1 to 20 frequencies
Custom scanner	1 to 20 channels or frequencies

Bluetooth Connectivity (Option 013)

Personal area network (PAN)
File transfer profile (FTP)
Web-based remote control

Wi-Fi Connectivity (Option 016)

Interface type	USB LAN Card
Interface standard	IEEE 802.11 b/g/n
Chipset	RealTek, Ralink
USB wireless mode	Infrastructure mode
Web-based remote control	Internet Explorer, Chrome, Safari
Internet protocol version	IPv4, IPv6

GSM/GPRS/EDGE Signal Analyzer (Options 022 and 042)

General Parameters						
Frequency range		450 MHz to 500 MHz 820 MHz to 965 MHz 1.705 GHz to 1.995 GHz				
Input signal range		−40 to +20 dBm				
Burst power		±1.0 dB				
Frequency error		±10 Hz + reference-frequency accuracy		99% confidence level		
GMSK modulation quality						
Phase RMS Accuracy						
Residual error		±1.0 degrees		(0 < Phase RMS < 8)		
Phase peak accuracy		0.7 degrees (typical)				
8 PSK modulation quality		±2.0 degrees		(0 < Phase peak < 30)		
EVM Accuracy						
Residual error		±1.5%		(2% < EVM < 8%)		
RF power vs. time		2.5%				
		±0.25 symbol				
Measurements						
Option 022						
Channel Power		Reference power	Frame average power	I/Q origin offset*	EVM Peak*	Frame average power
Channel power		Peak level at defined range	Burst power (Slot 0 to 7)	TSC	EVM 95th*	Frequency error
Spectral density		Spurious Emissions	TSC (Slot 0 to 7)	BSIC	Auto Measure	Phase error RMS
Peak to average power		Peak frequency at defined range	Constellation	C/I*	Channel power	Phase error peak
Occupied Bandwidth		Peak level at defined range	Burst power	EVM RMS*	Occupied bandwidth	EVM RMS*
Occupied bandwidth		Power vs. Time (slot)	Modulation type	TSC	Spectrum emission mask	EVM Peak*
Integrated power		Burst power	Frequency error	BSIC	Spurious emission mask	I/Q origin offset
Occupied power		Max/min point	Phase error RMS	C/I*	Burst power	C/I*
Spectrum Emission mask		Power vs. Time (frame)	Phase error peak	EVM RMS*	PvsT – Mask	
Option 042						
Channel/Frequency Scanner		Group (traffic, control)	(10 strongest)	Modulation Analyzer	Frame average power	Burst power
Channels or frequencies		BSIC (NCC, BCC)	Frame average power	Frame avg power trend	BSIC, frame no. and time	Modulation type
Absolute power		Multipath Profile	SNR, delay	C/I trend	C/I, frequency error	
Longitude, latitude, and satellite in all screens						

* Measurements performed for 8PSK modulation signals (edge) only.

WCDMA/HSPA+ Signal Analyzer (Options 023 and 043)

General Parameters					
Frequency range	Band 1 to 14, 19 to 22, 25, 26				
Input signal range	−40 to +20 dBm				
RF channel power accuracy	±1.0 dB, ±0.7 dB (typical)				
Occupied bandwidth accuracy	±100 kHz				
Adjacent channel leakage ratio (ACLR)	<−56 dB, ±0.7 dB at 5 MHz offset, <−58 dB, ±0.8 dB at 10 MHz offset				
WCDMA modulation	QPSK				
HSPA+ modulations	QPSK, 16 QAM, 64 QAM				
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level			
EVM accuracy	±2.0%	2% ≤ EVM ≤ 20%			
Residual EVM	2.5% (typical)				
Code domain power	±0.5 dB relative power ±1.5 dB absolute power	Code channel power >−25 dB Code channel power >−25 dB			
CPICH power accuracy	±0.8 dB (typical)				
Measurements					
Option 023					
Channel Power	Multi-ACLR	Peak CDE	Max, avg active power	Code utilization	Channel power
Channel power	Lowest reference power	Frequency error	Max, avg inactive power	RCSI	Occupied bandwidth
Spectral density	Highest reference power	Frequency error	Scramble code	CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Spectrum emission mask
Peak to average power	Abs power at defined range	Time offset	Relative Code Domain Error	CDP Table	EVM
Occupied Bandwidth	Rel power at defined range	Carrier feed-through	Abs/Rel code power	Reference power	Peak CDE
Occupied bandwidth	Spurious Emissions	Scramble code	Code error	Code utilization	Carrier feed-through
Integrated power	Peak frequency at defined range	Code Domain Power	Individual code EVM, RCDE, and its constellation	Code, spreading factor	CPICH absolute power
Occupied power	Peak level at defined range	Abs/Rel code power	Channel power	Allocation (channel type)	CPICH relative power
Spectrum Emission Mask	Constellation	Individual code EVM and its constellation	Power bar graph (Abs/Rel/Delta power) CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	EVM, modulation type	Max inactive power
Abs power at defined range	CPICH power	Channel power	Avg RCDE QPSK, 16 QAM, 64 QAM	Relative, absolute power	Scramble code
Rel power at defined range	Rho, EVM	Power bar graph (Abs/Rel/Delta power) CPICH, P-CCPCH, S-CCPCH PICH, P-SCH, S-SCH	Codogram	Auto Measure	Power Statistics CCDF
Option 043					
Channel Scanner (up to 6)	Channel power	Channel, multipath power	Channel power	Frequency error	Amplifier capacity
Frequencies or channels	CPICH dominance	Ec/Io, delay	Scramble code	Time offset, Rho	Peak amplifier capacity
Channel power, scramble code, CPICH power, Ec/Io	Scramble code	Code Domain Power	CPICH, P-CCPCH, S-CCPCH, PICH, P-SCH, S-SCH	Carrier feed-through	Average amplifier capacity
Scramble Scanner (up to 6)	Ec/Io, CPICH power, delay	Abs/Rel code power	Max, avg active power	(Composite) EVM	Code, peak utilization
Channel power	Multipath Profile	Individual code EVM	Max, avg inactive power	CPICH EVM, P-CCPCH EVM	

Longitude, latitude, and satellite in all screens

cdmaOne/cdma2000® Signal Analyzer (Options 020 and 040)

General Parameters					
Frequency range		Band 0 to 10			
Input signal level		−40 to +20 dBm			
RF channel power accuracy		±1.0 dB (typical)			
CDMA compatibility		cdmaOne and cdma2000			
Frequency error		±10 Hz + ref freq accuracy		99% confidence level	
Rho accuracy		±0.005		0.9 < Rho < 1.0	
Residual Rho		>0.995 (typical)			
PN offset		1 x 64 chips			
Code domain power		±0.5 dB relative power ±1.5 dB absolute power		Code channel power > −25 dB Code channel power > −25 dB	
Pilot power accuracy		±1.0 dB (typical)			
Time offset		±1.0 μs, ±0.5 μs (typical)		External trigger	
Measurements					
Option 020					
Channel Power	ACPR	Peak level at defined range	Channel power	Reference power	Rho
Channel power	Reference power	Constellation	Power bar graph (Abs/Rel)	Code utilization	Frequency error
Spectral density	Abs power at defined range	Pilot power	Pilot, Paging, Sync, Q-Paging	Code, spreading factor	Time offset
Peak to average power	Rel power at defined range	Rho	Max, avg active power	Allocation (channel type)	Carrier feed-through
Occupied Bandwidth	Multi-ACPR	EVM	Max, avg inactive power	Relative, absolute power	Pilot power
Occupied bandwidth	Lowest reference power	Frequency error	PN offset	Auto Measure	Max inactive power
Integrated power	Highest reference power	Time offset	Codogram	Channel power	PN offset
Occupied power	Abs power at defined range	Carrier feed-through	Code utilization	Occupied bandwidth	Power Statistics CCDF
Spectrum Emission Mask	Rel power at defined range	PN offset	RCSI	Spectrum emission mask	
Reference power	Spurious Emissions	Code Domain Power	Pilot, Paging, Sync, Q-Paging	ACPR	
Peak level at defined range	Peak freq at defined range	Abs/Rel code power	CDP Table	Multi-ACPR	
Option 040					
Channel Scanner (up to 6)	Pilot dominance	Ec/Io, delay	Max, avg active power	Peak amplifier capacity	Ec/Io
Frequencies or channels	PN offset	Code Domain Power	Max, avg inactive power	Average amplifier capacity	
Channel power, PN offset	Ec/Io, pilot power, delay	Abs/Rel code power	Frequency error	Code utilization	
Pilot power, Ec/Io	Multipath Profile	Channel power	Time offset, Rho, EVM	Average utilization	
PN Scanner (up to 6)	Channel power	PN offset	Carrier feed-through	Route Map	
Channel power	Multipath power	Pilot, Paging, Sync, Q-Paging power	Amplifier capacity	Pilot power	

Longitude, latitude, and satellite in all screens

EV-DO Signal Analyzer (Options 021 and 041)

General Parameters					
Frequency range		Band 0 to 10			
Input signal level		−40 to +20 dBm			
RF channel power accuracy		±1.0 dB (typical)			
EV-DO compatibility		Rev 0, Rev A and Rev B			
Frequency error		±10 Hz + ref freq accuracy	99% confidence level		
Rho accuracy		±0.005	0.9 < Rho < 1.0		
Residual Rho		>0.995 (typical)			
PN offset		1 x 64 chips			
Code domain power		±0.5 dB relative power ±1.5 dB absolute power	Code channel power >−25 dB Code channel power >−25 dB		
Pilot power accuracy		±1.0 dB (typical)			
Time offset		±1.0 μs, ±0.5 μs (typical)	External trigger		
Measurements					
Option 021					
Channel Power	Multi-ACPR	Rho, EVM, Peak CDE	Code Domain Power (pilot and MAC 64/128)	Code utilization	Pilot, MAC, data power
Channel power	Lowest reference power	Frequency error	Pilot/MAC channel power	RCSI	On/off ratio
Spectral density	Highest reference power	Time offset	Slot average power	Slot, pilot, MAC, data	PvsT mask (idle slot) or PvsT mask (active slot)
Peak to average power	Abs power at defined range	Carrier feed-through	Max active I/Q power	MAC CDP table	Frequency error
Occupied Bandwidth	Rel power at defined range	PN offset	Avg active I/Q power	Reference power	Time offset
Occupied bandwidth	Spurious Emissions	Pilot, MAC, data power	Max inactive I/Q power	Code utilization	Carrier feed-through
Integrated power	Peak frequency at defined range	Pilot, MAC, data EVM	Avg inactive I/Q power	Code, spreading factor	Pilot, MAC, data Rho
Occupied power	Peak level at defined range	Constellation (pilot, MAC 64/128, and data)	PN offset	Allocation (channel type)	Max inactive I/Q power
Spectrum Emission Mask	Power vs. Time (idle and active slot)	Channel power	Code Domain Power (data)	Relative, absolute power	PN offset
Reference power	Slot average power	Rho, EVM, peak CDE	Data channel power	Auto Measure	Power Statistics CCDF
Peak level at defined range	On/off ratio	Frequency error	Slot average power	Channel power	
ACPR	Idle activity	Time offset	Max, avg active power	Occupied bandwidth	
Reference power	Pilot, MAC, data power	Carrier feed-through	Max, avg inactive power	Spectrum emission mask	
Abs power at defined range	Constellation (composite 64/128)	PN offset	PN offset	ACPR	
Option 041					
Channel scanner (up to 6)	Channel power	Channel power	PN offset	Time offset	Peak utilization
Frequencies or channels	Pilot dominance	Multipath power	Pilot, MAC, data power	Carrier feed-through	Average utilization
PN offset	PN offset	Ec/Io, delay	Pilot, MAC, data Rho	Max active I/Q power	Route Map
Pilot, MAC, data power	Ec/Io, pilot power, delay	Code Domain Power	(Composite) EVM	Avg active I/Q power	Pilot power
PN Scanner (up to 6)	Multipath Profile	Slot average power	Frequency error	Code utilization	Ec/Io

Longitude, latitude, and satellite in all screens

*Measurement is performed in Data Constellation only.

TD-SCDMA Signal Analyzer (Options 025 and 045)

General Parameters					
Frequency range		1.785 GHz to 2.22 GHz			
Input signal level		−40 to +25 dBm			
Channel power (RRC) accuracy		±1.0 dB (typical)			
Modulations		QPSK, 8 PSK, 16 QAM, 64 QAM			
Frequency error		±10 Hz + ref freq accuracy		99% confidence level	
Residual EVM (RMS)		2.0% (typical)		P-CCPCH slot and 1 channel	
Time error (Tau)		±1.0 μs (typical)		External trigger	
Spreading factor		Auto (DL, UL), 1, 2, 4, 8, 16			
Measurements					
Option 025					
Channel Power	Peak level at defined range	Spurious Emissions	Power vs. Time (frame)	(TS [0 to 6], DwPTS, UpPTS)	Frequency error
Channel power	ACLR	Peak frequency at defined range	Slot power	Power vs. Time (mask)	I/Q origin offset
Spectral density	Reference power	Peak level at defined range	(TS [0 to 6], DwPTS, UpPTS)	Slot power	Time offset
Peak to average power	Abs power at defined range	Power vs. Time (slot)	Data power left	On/off slot ratio	Midamble Power
Occupied Bandwidth	Rel power at defined range	Slot power	(TS [0 to 6], DwPTS, UpPTS)	Off power	Slot power
Occupied bandwidth	Multi-ACLR	DwPTS power	Midamble Power	Timogram	DwPTS power
Integrated power	Lowest reference power	UpPTS power	(TS [0 to 6], DwPTS, UpPTS)	Constellation	Midamble power (1 to 16)
Occupied power	Highest reference power	On/off slot ratio	Data power right	Rho	Code Power
Spectrum Emission Mask	Abs power at defined range	Slot PAR	(TS [0 to 6], DwPTS, UpPTS)	EVM RMS, EVM peak	Abs/Rel code power
Reference power	Rel power at defined range	DwPTS code	Time offset	Peak CDE	Individual code EVM and its constellation
Data format	Max inactive code power	Slot, DwPTS power	Avg inactive code power	ACLR	Frequency error
Slot power, DwPTS power	Avg inactive code power	No. of active code	Peak CDE and peak active CDE	Multi-ACLR	EVM RMS
No. of active code	Code Error	Scramble code	Auto Measure	Slot power	Peak CDE
Scramble code	Code power and error	Max active code power	Channel power	DwPTS power	Max inactive power
Max active code power	Individual code EVM and its constellation	Avg active code power	Occupied bandwidth	UpPTS power	Scramble code
Avg active code power	Data format	Max inactive code power	Spectrum emission mask	On/off slot ratio	
Option 045					
Sync-DL ID Scanner (32)	Pilot dominance	Pilot dominance	Pilot dominance	Pilot dominance	DwPTS Power
Scramble code group	Sync-DL ID vs. Tau (up to 6)	Sync-DL ID Multipath	Sync-DL ID Analyzer	EVM, frequency error	
Ec/Io, Tau	ID, power, Ec/Io, Tau	Ec/Io, Tau	DwPTS power, Ec/Io trend	Ec/Io, CINR	
DwPTS power	DwPTS power	DwPTS power	DwPTS power	Route Map	

Longitude, latitude, and satellite in all screens

Mobile WiMAX Signal Analyzer (Options 026 and 046)

General Parameters					
Frequency range		2.1 GHz to 2.7 GHz 3.4 GHz to 3.85 GHz			
Input signal level		−40 to +20 dBm			
Channel power accuracy		±1.0 dB (typical)			
Supported bandwidth		7 MHz, 8.75 MHz, and 10 MHz			
Frequency error		±10 Hz + reference-frequency accuracy		99% confidence level	
Residual EVM (RMS)		1.5% (typical)			
Measurements					
Option 026					
Channel Power	Spurious Emissions	Constellation	Max, min, avg power	Auto Measure	Spectral flatness
Channel power	Peak frequency at defined range	Channel power	EVM vs. Subcarrier	Channel power	Frequency error
Spectral density	Peak level at defined range	RCE RMS, RCE peak	RCE RMS, RCE peak	Occupied bandwidth	RCE RMS
Peak to average power	Power vs. Time (frame)	EVM RMS, EVM peak	EVM RMS, EVM peak	Spectrum emission mask	RCE peak
Occupied Bandwidth	Channel power	Frequency error	Segment ID, cell ID	Spurious emission mask	EVM RMS
Occupied bandwidth	Frame average power	Time offset	Preamble index	Preamble power	EVM peak
Integrated power	Preamble power	Segment ID, cell ID	EVM vs. Symbol	DL burst power	Power Statistics CCDF
Occupied power	DL burst power	Preamble index	RCE RMS, RCE peak	UL burst power	
Spectrum Emission Mask	UL burst power	Spectral Flatness	EVM RMS, EVM peak	Frame average power	
Reference power	I/Q origin offset	Average subcarrier power	Segment ID, cell ID	Time offset	
Peak level at defined range	Time offset	Subcarrier power variation	Preamble index	I/Q origin offset	
Option 046					
Preamble Scanner (up to 6)	Time offset	Relative power, delay	Preamble power	Preamble	Preamble power
Total preamble power	Multipath Profile	Preamble power trend	Frame avg power	Cell ID, sector ID	
Preamble, relative power	Total preamble power	Preamble Power Trend	Relative power	Time offset	
Cell ID, sector ID	Multipath power	Relative power trend	C/I	Route Map	

Longitude, latitude, and satellite in all screens

LTE/LTE-Advanced — FDD Signal Analyzer (Options 028/030/032 and 048)

General Parameters		
Frequency range	Band 1 to 14, 17 to 26	
Input signal level	−40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidths	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM
Measurements		

Option 028/030/032

Channel Power	Power vs. Time (frame)	Control Channel	Data EVM RMS, peak	Antenna 1 RS power and EVM	PDSCH/Data* 64 QAM EVM
Channel power	Frame average power	Control channel summary (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	RS EVM RMS, peak		PDSCH 256QAM EVM
Spectral density	Subframe power		Cell, group, sector ID	Antenna 2 RS power and EVM**	Data EVM RMS, peak
Peak to average power	First slot power		Frame		RS, P-SS, S-SS EVM
Occupied Bandwidth	Second slot power		MBSFN*	Antenna 3 RS power and EVM**	RS, P-SS, S-SS power
Occupied bandwidth	Cell ID, I/Q origin offset	EVM, relative or absolute power, modulation type	Frame summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/	Data Allocation Map	PBCH power
Integrated power	Time offset		RS, MBSFN*, PDSCH/		Subframe power
Occupied power	Constellation	Each control channels'	Data* QPSK, PDSCH/	Data allocation vs frame	OFDM power
Spectrum Emission Mask	MBSFN*	I/Q diagram	Data* 16 QAM, PDSCH/	Resource block power	Time error
	RS TX power	Modulation format	Data* 64 QAM, PDSCH/	OFDM symbol power	I/Q origin offset
Reference power	PDSCH/Data* QPSK EVM	Frequency error	Data* 64 QAM, PDSCH 256QAM)	Data utilization	Carrier Aggregation**
Peak level at defined range	PDSCH/Data* 16 QAM EVM	I/Q origin offset	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Component carriers: up to 5
ACLR	PDSCH/Data* 64 QAM EVM	EVM RMS, EVM peak		Resource block power	
Reference power	PDSCH 256QAM EVM				
	Data EVM RMS	Subframe	Frame average power	Data utilization	Subframe power
Abs power at defined range	Data EVM peak	MBSFN*	OFDM symbol power	Auto Measure	P-SS, S-SS, PBCH, RS power and EVM
	Frequency error	Subframe summary table (P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/	Frequency error	Channel power	
Rel power at defined range	Time error	Data* QPSK, PDSCH/	I/Q origin offset	Occupied bandwidth	PDSCH/Data* QPSK power and EVM
Multi-ACLR	Data Channel	Data* 16 QAM, PDSCH/	EVM RMS, peak	Spectrum emission mask	
Lowest reference power	MBSFN*	Data* 64 QAM, PDSCH 256QAM)	Data EVM RMS, peak	ACLR	PDSCH/Data* 16 QAM power and EVM
Highest reference power	Resource block power		Cell, group, sector ID	Multi-ACLR	
Abs power at defined range	I/Q diagram		Time Alignment Error	Spurious emission mask	PDSCH/Data* 64 QAM power and EVM
	RB power	EVM, relative or absolute power, modulation type	Time alignment error trend	Frame average power	PDSCH 256QAM EVM
Rel power at defined range	Modulation format			Time alignment error	Cell ID
Spurious Emissions	I/Q origin offset	Subframe power	Time alignment error	Frequency error	Frequency error
Peak frequency at defined range	EVM RMS, EVM peak	OFDM symbol power	RS power difference	MBSFN*	Time alignment error
		Frequency, time error	Antenna 0 RS power and EVM	PDSCH/Data* QPSK EVM	Antenna port
Peak level at defined range				PDSCH/Data* 16 QAM EVM	Power Statistics CCDF

Option 048

Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control channel table	PMCH subframe power*	Route Map
Frequency or channels	RSRP/RSRQ dominance	Cell, group, sector ID	(P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time alignment error	RSRP
Cell, group, sector ID	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay		Time offset	RSRQ
Channel power	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay		Datagram	RS-SINR
RSRP/RSRQ	Cell, group, sector ID	Ant 2 RS Ec/Io**, delay**	Absolute power	Datagram	S-SS RSSI
RS-SINR	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**	Relative power	Resource block power	P-SS/S-SS Power
Antenna port	RS-SINR/S-SS RSSI	Control Channel	EVM RSM, phase	Data utilization	S-SS Ec/Io
	P-SS/S-SS Power	RS power trend	Frequency error		
	S-SS Ec/Io	Cell, group, sector ID			

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 030 is enabled.

LTE/LTE-Advanced — TDD Signal Analyzer (Options 029/031/033 and 049)

General Parameters		
Frequency range	Band 33 to 43	
Input signal level	−40 to +20 dBm	
Channel power accuracy	±1.0 dB (typical)	
Supported bandwidth	1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, and 20 MHz	
Frequency error	±10 Hz + reference-frequency accuracy	99% confidence level
Residual EVM (RMS)	2.0% (typical)	Data EVM
Measurements		

Option 029/031/033					
Channel Power	Spurious Emissions	Data EVM peak	Subframe	Antenna 3 RS power and EVM**	PDSCH/Data* 64 QAM EVM
Channel power	Peak frequency at defined range	Frequency error	MBSFN*		PDSCH 256QAM EVM
Spectral density		Time error	Subframe summary table	Cell, group, sector ID	Data EVM RMS, peak
Peak to average power	Peak level at defined range	Data Channel	(P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*, PDSCH/Data*)	Data Allocation Map	RS, P-SS, S-SS EVM
Occupied Bandwidth		MBSFN*		Data allocation vs frame	RS, P-SS, S-SS power
Occupied bandwidth	Power vs. Time (frame)	Resource block power		Resource block power	PBCH power
Integrated power	Frame average power	I/Q diagram		OFDM symbol power	Subframe power
Occupied power	Subframe power	RB power		Data utilization	OFDM power
			QPSK, PDSCH/Data* 16 QAM, PDSCH/Data* 64 QAM, PDSCH 256QAM)		
Spectrum Emission Mask	First slot power	Modulation format	EVM, relative or absolute power, modulation type	Data allocation vs subframe	Time error
Reference power	Second slot power	I/Q origin offset			I/Q origin offset
Peak level at defined range	Cell ID, I/Q origin offset	EVM RMS, EVM peak	Subframe power	Resource block power	Carrier Aggregation**
	Time offset	Control Channel	OFDM symbol power	Data utilization	Component carriers: up to 5
ACLR	Power vs. Time (slot)	Control channel summary	Frequency, time error	Auto Measure	
Reference power	Slot average power	(P-SS, S-SS, PBCH, PCFICH, PHICH, PDCCH, RS, MBSFN*)	Data EVM RMS, peak	Channel power	Subframe power
Abs power at defined range	Transient period length		RS EVM RMS, peak	Occupied bandwidth	P-SS, S-SS, PBCH, RS power and EVM
	Off power		Cell, group, sector ID	Spectrum emission mask	
Rel power at defined range	Constellation	EVM, relative or absolute power, modulation type	Time Alignment Error	ACLR	PDSCH/Data* QPSK power and EVM
	MBSFN*		Time alignment error trend	Multi-ACLR	
Multi-ACLR	RS TX power	Each control channels'	Time alignment error	Spurious emission mask	PDSCH/Data* 16 QAM power and EVM
Lowest reference power	PDSCH/Data* QPSK EVM	I/Q diagram	RS power difference	Slot average power	
Highest reference power	PDSCH/Data* 16 QAM EVM	Modulation format	Antenna 0 RS power and EVM	Off power	PDSCH/Data* 64 QAM power and EVM
Abs power at defined range		Frequency error		Transition period	PDSCH 256QAM EVM
	PDSCH/Data* 64 QAM EVM	I/Q origin offset	Antenna 1 RS power and EVM	Time alignment error	Cell ID
Rel power at defined range	PDSCH 256QAM EVM	EVM RMS, EVM peak	Antenna 2 RS power and EVM**	MBSFN*	Frequency error
				PDSCH/Data* QPSK EVM	Time alignment error
	Data EVM RMS			PDSCH/Data* 16 QAM EVM	Antenna port
					Power Statistics CCDF

Option 049					
Channel Scanner (up to 6)	ID Scanner (up to 6)	Multipath Profile	Control Channel	EVM RSM, phase	Route Map
	RSRP/RSRQ dominance	Cell, group, sector ID	RS power trend	Frequency error	RSRP
Frequency or channels	S-SS RSSI dominance	Ant 0 RS Ec/Io, delay	Cell, group, sector ID	PMCH subframe power*	RSRQ
Cell, group, sector ID	S-SS Ec/Io dominance	Ant 1 RS Ec/Io, delay	Control channel table	Time alignment error	RS-SINR
Channel power	Cell, group, sector ID	Ant 2 RS Ec/Io**, delay**	(P-SS, S-SS, PBCH, PCFICH, RS 0, RS 1, RS 2**, RS 3**, MBSFN RS*)	Time offset	S-SS RSSI
RSRP/RSRQ	RSRP/RSRQ	Ant 3 RS Ec/Io**, delay**		Datagram	P-SS, S-SS power
RS-SINR	RS-SINR/S-SS RSSI			Datagram	S-SS Ec/Io
Antenna port	P-SS/S-SS power		Absolute power	Resource block power	
	S-SS Ec/Io		Relative power	Data utilization	

Longitude, latitude, and satellite in all screens

*Measurement is performed when MBMS is enabled.

**Measurement is performed when option 031 is enabled.

EMF Analyzer (Option 050)

General Parameters		
Supported Antenna	Isotropic Antenna G700050380 26 MHz to 3 GHz	
Mode	Sweep / FFT	
Trace	X-Axis, Y-Axis, Z-Axis, Current, Isotropic, Isotropic Accumulated	
Limit lines	MSL, ICNIRP	
Dwell Time	1 to 60s	
Measurement Time	1 to 30 min (# of measurement = Measurement Time / (Dwell Time x 3)	
Units	dBµV/m, dBmV/m, dBV/m, V/m, W/m², dBm/m², dBW/m², A/m, dBA/m, and Watt/cm².	
Miscellaneous	Spectrum logging and Replay Export to CSV PDF Report Generation	
Measurement		
Option 050 and G700050380		
Trace: X-Axis, Y-Axis, Z-Axis, Current, Isotropic, Isotropic Accumulated	Isotropic EMF Power: AVG, Max, Min	Accumulated Isotropic EMF Power: AVG, Max, Min

RFoCPRI/Interference Analyzer (Option 008, 060, 061, 062, 063, 064, and 065)

General Parameters					
Optical interface		Dual SFP/SFP+ (supports all MSA compliant SFP modules)			
Line rates		614.4 Mbps (1x) , 1228.8 Mbps (2x)		Option 008 and 060	
		2457.6 Mbps (4x)		Option 008 and 061	
		3072.0 Mbps (5x)		Option 008 and 062	
		4915.2 Mbps (8x)		Option 008 and 063	
		6144.0 Mbps (10x)		Option 008 and 064	
		9830.4 Mbps (16x)		Option 008 and 065	
Resolution Bandwidth (RBW)					
–3 dB bandwidth		1 kHz to 10 kHz (span ≤ 3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span < 30.86 MHz)		1-3-10 sequence	
Accuracy		±10% (nominal)			
VBW					
–3 dB bandwidth		1 Hz to 100 KHz		1-3-10 sequence	
Accuracy		±10% (nominal)			
CPRI Parameter					
IQ Sample width		4 – 20 (step 1)			
Mapping method		1 and 3			
TX clock		Internal/external/recovered			
Port type		Master/slave			
Map position		AxC#0 – AxC#7			
Bandwidth		1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
Measurements					
Layer-2 Monitoring		Layer-2 Term		Interference Analyzer	
Port 1	Port 2	Port 1 or 2 (exclusive)		Spectrum	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
LOS	LOS	LOS SDI			
LOF	LOF	LOF RAI			
SDI	SDI	Optic RX level	dBm		
RAI	RAI	Protocol version	1 to 10	Spectrogram	Collect up to 72 hr of data
Optic RX level	Optic RX level	C and M HDLC rate (kbps)	No HDLC, 240, 480, 960, 1920, 2400	RSSI	Collect up to 72 hr of data
SFP Information	SFP Information			Spectrum replay	X1, x2, x4, x8
Wavelength	Wavelength	C and M Ethernet subchannel number	20 to 63	PIM Detection	
Vendor	Vendor			Single carrier	
Vendor PN	Vendor PN	Alarm Injection		Multi carrier	
Vendor rev	Vendor rev	R-LOS	Single	PIM calculator	
Power level type	Power level type	R-LOF	Single		
Diagnostic byte	Diagnostic byte	Error Injection			
Nominal rate	Nominal rate	Code	Single/rate		
Min rate	Min rate	K30.7	Single/rate		
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

RFoBSAI™ Interference Analyzer (Option 070, 071, 072, 073)

General Parameters					
Optical interface		Dual SFP/SFP+ (supports all MSA compliant SFP modules)			
Line rates	768 Mbps (1x)		Option 070		
	1536 Mbps (2x)		Option 071		
	3072 Mbps (4x)		Option 072		
	6144 Mbps (8x)		Option 073		
Resolution Bandwidth (RBW)		1 kHz to 10 kHz (span ≤ 3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span ≤ 30.86 MHz)			
		Accuracy	±10% (nominal)		
Video Bandwidth (RBW)		1 Hz to 100 KHz			
		Accuracy	±10% (nominal)		
RP3 Type		LTE (FDD/TDD), UMTS (FDD)			
RP3 Address		Hexadecimal			
TX clock		Internal/external/recovered			
Port type		Master/slave			
Bandwidth		LTE-FDD/TDD: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz UMTS: 3MHz for downlink, 5MHz for Uplink			
RP3 Address List		RP3 Address, Technology, Scrambler seed*, Message Count*			
Scrambler Seed		Nx7 Index: 0 – 17, step 1			
Measurements					
Layer-2 Monitoring		Layer-2 Term		Interference analyzer	
Port 1	Port 2	Port 1 or 2 (exclusive)		Spectrum	Sound indicator, AM/FM audio demodulation, interference ID, spectrum recorder
LOS	LOS	LOS			
LOF	LOF	LOF			
Code Violation	Code Violation	Optic RX level	dBm	Spectrogram	Collect up to 72 hr of data
K30.7 words	K30.7 words	Optic TX level	dBm		
Optic RX level	Optic RX level	Port Type	Master		
Optic TX level	Optic TX level	TX State	State machine	RSSI	Collect up to 72 hr of data
Messages Address	Message Address	RX State	State machine	Spectrum replay	X1, x2, x4, x8
Message Counter	Message Counter	TX Address	RP3 Address (Hexadecimal)		
SFP Information	SFP Information	RX Address	RP3 Address (Hexadecimal)	PIM Detection	Single carrier Multi carrier PIM calculator
Wavelength	Wavelength	Word Sync Loss Event			
Vendor	Vendor	Code Violation			
Vendor PN	Vendor PN	K30.7 words			
Vendor rev	Vendor rev	Frame Sync Loss Events			
Power level type	Power level type	Alarm Injection			
Diagnostic byte	Diagnostic byte	K30.7	Single		
Nominal rate	Nominal rate	Error Injection			
Min rate	Min rate	Code	Single/rate		
Max RX level	Max RX level	Error rate	1E-3 to 1E-9		
Max TX level	Max TX level				

* Available only when the link rate is 61Gbps

RFoCPRI™ LTE-FDD Signal Generator (Option 081)

General Parameters		
Optical interface	Dual SFP/SFP+ (supports all MSA compliant SFP modules)	
Link Rate	614.4 Mbps (1x), 1228.8 Mbps (2x), 2457.6 Mbps (4x), 3072.0 Mbps (5x), 4915.2 Mbps (8x), 6144.0 Mbps (10x), 9830.4 Mbps (16x)	
IQ Sample width	8 – 20 bits	
Mapping method	Packed and Flexible	
Waveform	Off: CW On: LTE-FDD E-TM1.1, E-TM1.2, E-TM2, E-TM3.1, E-TM3.2, E-TM3.3	
Bandwidth	5 MHz, 10MHz, 15MHz, 20MHz	
Sampling Frequency	N x 3.84MHz (N=2, 4, 6, 8)	
Gain dynamic range	0 to -50 dB	
Frequency error	±10 Hz + ref freq accuracy	99% confidence level
Residual EVM (RMS)	0.2% (typical)	Data EVM

RFoCPRI™ LTE-TDD Signal Generator (Option 082)

General Parameters		
Optical Hardware (Option 008)		
Interface	Two SFP/SFP+ ports (supports all MSA compliant SFP modules), One Ethernet port	
CPRI Parameter		
Line coding	8B/10B	
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062)	4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)
CPRI Parameter		
IQ Sample width	4 – 20 (step 1)	
Mapping method	1 and 3	
Waveform	CW, LTE-TDD E-TM1.1, E-TM1.2, E-TM2, E-TM3.1, E-TM3.2, E-TM3.3	
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz	
Sampling Frequency	N x 3.84 MHz (N=2, 4, 6, 8)	
Gain dynamic range	0 to –50 dB	
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level	
Residual EVM (RMS)	0.02% (typical), Data EVM	

RFoOBSAI™ LTE-FDD Signal Generator (Option 086)

General Parameters		
Optical Hardware (Option 008)		
Interface	Two SFP/SFP+ ports (supports all MSA compliant SFP modules), One Ethernet port	
OBSAI Parameter		
Line coding	8B/10B	
Line rates	768 Mbps (Option 070) 1536 Mbps (Option 071)	3072 Mbps (Option 072) 6144 Mbps (Option 073)
CPRI Parameter		
RP3 Type	LTE	
RP3 Address	Hexadecimal	
Waveform	CW, LTE-FDD E-TM1.1, E-TM1.2, E-TM2, E-TM3.1, E-TM3.2, E-TM3.3	
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz	
Sampling Frequency	N x 3.84 MHz (N=2, 4, 6, 8)	
Gain dynamic range	0 to –50 dB	
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level	
Residual EVM (RMS)	0.02% (typical), Data EVM	

RFoCPRI™ LTE-FDD Analyzer (Option 091)

General Parameters			
Optical Hardware (Option 008)			
Interface	Two SFP/SFP+ ports (supports all MSA compliant SFP modules), One Ethernet port		
CPRI Parameter			
Line coding	8B/10B		
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062)	4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)	
Resolution Bandwidth (RBW)			
–3 dB bandwidth	100kHz		
Accuracy	±10% (nominal)		
CPRI Parameter			
IQ Sample width	4 – 20 (step 1)		
Mapping method	1 and 3		
TX clock	Internal/External/Recovered		
Port type	Master/slave		
Map Position	AxC#0 – AxC#7		
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz		
Span	Fixed and equal to sampling frequency of LTE signal		
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level		
Residual EVM (RMS)	0.02% (typical), Data EVM		
Measurements: Option 008, 060, 061, 062, 063, 064, and 065			
Channel Power	Constellation	Subframe	Frame
Channel power	MBSFN*	MBSFN*	MBSFN*
Spectral density	RS TX Power	Subframe Summary	Frame Summary
Peak to average power	PDSCH/Data* QPSK EVM	EVM, Abs. and Rel. Power	EVM, Abs. and Rel. Power
Occupied bandwidth	PDSCH/Data* 16QAM EVM	Subframe Power	Frame Average Power
Occupied Bandwidth	PDSCH/Data* 64QAM EVM	OFDM Symbol Power	OFDM Symbol Power
Integrated Power	Data EVM RMS, Peak	Frequency Error	Frequency Error
Occupied power	Frequency error	Time Error	IQ Origin Offset
Power vs. Time (Frame)	Time Error	Data EVM RMS, Peak	Data EVM RMS, Peak
Frame average power	Control Channel	RS EVM RMS, Peak	Control EVM RMS, Peak
Subframe power	Control Channel Summary	Cell, Group, Sector ID	Cell, Group, Sector ID
First Slot power	EVM, Rel or Abs power of each control channel	Time Alignment Error	Data Allocation Map
Second Slot power		Time alignment error trend	Data Allocation vs. Frame
Cell ID, I/Q origin offset	IQ Diagram	Time alignment error	Resource Block Power
Time offset	Modulation format	RS power difference	OFDM Symbol Power
Power Statistics CCDF	Frequency Error	Antenna 0 RS power, EVM	Data Utilization
Average Power	I/Q origin offset	Antenna 1 RS power, EVM	Data Allocation vs Subframe
Peak Power Crest Factor	Control EVM RMS, Peak	Antenna 2 RS power, EVM **	Resource block power
	Data Channel	Antenna 3 RS power, EVM **	Data Utilization
	MBSFN*	Cell, Group, Sector ID	
	Resource block power		
	I/Q diagram		
	RB power		
	Modulation format		
	I/Q origin offset		
	EVM RMS, Peak		

* Longitude, latitude, and satellite in all screens

RFoCPRI™ LTE-TDD Analyzer (Option 092)

General Parameters			
Optical Hardware (Option 008)			
Interface	Two SFP/SFP+ ports (supports all MSA compliant SFP modules), One Ethernet port		
CPRI Parameter			
Line coding	8B/10B		
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062)	4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)	
Resolution Bandwidth (RBW)			
–3 dB bandwidth	100kHz		
Accuracy	±10% (nominal)		
CPRI Parameter			
IQ Sample width	4 – 20 (step 1)		
Mapping method	1 and 3		
TX clock	Internal/External/Recovered		
Port type	Master/slave		
Map Position	AxC#0 – AxC#7		
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz		
Span	Fixed and equal to sampling frequency of LTE signal		
Frequency error	±10 Hz + ref freq accuracy, 99% confidence level		
Residual EVM (RMS)	0.02% (typical), Data EVM		
Measurements: Option 008, 060, 061, 062, 063, 064, and 065			
Channel Power	Constellation	Subframe	Data Allocation Map
Channel power	MBSFN*	MBSFN*	Data Allocation vs. Frame
Spectral density	RS TX Power	Subframe Summary	Resource Block Power
Peak to average power	PDSCH/Data* QPSK EVM	EVM, Abs. and Rel. Power	OFDM Symbol Power
Occupied bandwidth	PDSCH/Data* 16QAM EVM	Subframe Power	Data Utilization
Occupied Bandwidth	PDSCH/Data* 64QAM EVM	OFDM Symbol Power	Data Allocation vs Subframe
Integrated Power	Data EVM RMS, Peak	Frequency Error	Resource block power
Occupied power	Frequency error	Time Error	Data Utilization
Power vs. Time (Frame)	Time Error	Data EVM RMS, Peak	Power Statistics CCDF
Frame average power	Control Channel	RS EVM RMS, Peak	Average Power
Subframe power	Control Channel Summary	Cell, Group, Sector ID	Peak Power Crest Factor
First Slot power	EVM, Rel or Abs power of each control channel	Time Alignment Error	
Second Slot power		Time alignment error trend	
Cell ID, I/Q origin offset	IQ Diagram	Time alignment error	
Time offset	Modulation format	RS power difference	
Power vs. Time (Slot)	Frequency Error	Antenna 0 RS power, EVM	
Slot average power	I/Q origin offset	Antenna 1 RS power, EVM	
Transient period length	Control EVM RMS, Peak	Antenna 2 RS power, EVM **	
Off power	Data Channel	Antenna 3 RS power, EVM **	
	MBSFN*	Cell, Group, Sector ID	
	Resource block power		
	I/Q diagram		
	RB power		
	Modulation format		
	I/Q origin offset		
	EVM RMS, Peak		

* Longitude, latitude, and satellite in all screens

RFoBSAI™ LTE-FDD Analyzer (Option 096)

General Parameters			
Optical Hardware (Option 008)			
Interface	Two SFP/SFP+ ports (supports all MSA compliant SFP modules), One Ethernet port		
CPRI Parameter			
Line coding	8B/10B		
Line rates	768 Mbps (Option 070) 1536 Mbps (Option 071)	3072 Mbps (Option 072) 6144 Mbps (Option 073)	
Resolution Bandwidth (RBW)			
–3 dB bandwidth	100kHz		
Accuracy	±10% (nominal)		
OBSAI Parameter			
RP3 type	LTE (FDD/TDD), UMTS (FDD)		
RP3 address	Hexadecimal		
TX clock	Internal/external/recovered		
Port type	Master/slave		
Bandwidth	LTE-FDD/TDD: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz UMTS: 3 MHz for downlink, 5 MHz for uplink		
RP3 address list	RP3 address, Technology, Scrambler seed*, Message Count*		
Scrambler seed	Nx7 Index: 0 – 17, step 1		
Measurements			
Channel Power	Constellation	Subframe	Frame
Channel power	MBSFN*	MBSFN*	MBSFN*
Spectral density	RS TX Power	Subframe Summary	Frame Summary
Peak to average power	PDSCH/Data* QPSK EVM	EVM, Abs. and Rel. Power	EVM, Abs. and Rel. Power
Occupied bandwidth	PDSCH/Data* 16QAM EVM	Subframe Power	Frame Average Power
Occupied Bandwidth	PDSCH/Data* 64QAM EVM	OFDM Symbol Power	OFDM Symbol Power
Integrated Power	Data EVM RMS, Peak	Frequency Error	Frequency Error
Occupied power	Frequency error	Time Error	IQ Origin Offset
Power vs. Time (Frame)	Time Error	Data EVM RMS, Peak	Data EVM RMS, Peak
Frame average power	Control Channel	RS EVM RMS, Peak	Control EVM RMS, Peak
Subframe power	Control Channel Summary	Cell, Group, Sector ID	Cell, Group, Sector ID
First Slot power	EVM, Rel or Abs power of each control channel	Time Alignment Error	Data Allocation Map
Second Slot power		Time alignment error trend	Data Allocation vs. Frame
Cell ID, I/Q origin offset	IQ Diagram	Time alignment error	Resource Block Power
Time offset	Modulation format	RS power difference	OFDM Symbol Power
Power Statistics CCDF	Frequency Error	Antenna 0 RS power, EVM	Data Utilization
Average Power	I/Q origin offset	Antenna 1 RS power, EVM	Data Allocation vs Subframe
Peak Power Crest Factor	Control EVM RMS, Peak	Antenna 2 RS power, EVM **	Resource block power
	Data Channel	Antenna 3 RS power, EVM **	Data Utilization
	MBSFN*	Cell, Group, Sector ID	
	Resource block power		
	I/Q diagram		
	RB power		
	Modulation format		
	I/Q origin offset		
	EVM RMS, Peak		

* Longitude, latitude, and satellite in all screens

RFoCPRI BBU Emulation for Alcatel-Lucent (Option 101)

General Parameters			
Optical Hardware (Option 008)			
Interface	Two SFP/SFP+ ports (supports all MSA compliant SFP modules), One Ethernet port		
CPRI Parameter			
Line coding	8B/10B		
Line rates	614.4 Mbps, 1228.8 Mbps (Option 060) 2457.6 Mbps (Option 061) 3072.0 Mbps (Option 062)	4915.2 Mbps (Option 063) 6144.0 Mbps (Option 064) 9830.4 Mbps (Option 065)	
Resolution Bandwidth (RBW)			
–3 dB bandwidth	1 kHz to 10 kHz (span ≤ 3.84 MHz) 1 KHz to 100 kHz (3.84 MHz < span ≤ 30.86 MHz)		
Accuracy	±10% (nominal)		
CPRI Parameter			
IQ Sample width	4 – 20 (step 1)		
Mapping method	1 and 3		
TX clock	Internal/External		
Port type	Master		
Bandwidth	5 MHz, 10 MHz, 15 MHz, 20 MHz		
Span	Adjustable (Max Span= Sampling Frequency)		
Measurements			
Carrier Configuration	SFP Information	Spectrum Clearance	Coverage Range
RRH Description	RRH Description	Spectrum	Spectrum
Carrier Information	SFP Information	Spectrogram	Carrier Information
CPRI & Active SW	Profile Editor	RSSI	VSWR
RRH Description		Dual Spectrum	Tilt
CPRI State		Dual Active Trace	PIM Analysis
Active SW		Dual Spectrogram	Single Radio
			Spectrum
			Flatness

General Information

Inputs and Outputs		
RF In	Spectrum analyzer	
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+40 dBm, ±50 V DC (nominal)	
RF Out		
Connector	Type-N, female	
Impedance	50 Ω (nominal)	
Damage level	>+37 dBm, ±50 V DC (nominal)	
External Trigger, GPS		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
External Ref		
Connector	SMA, female	
Impedance	50 Ω (nominal)	
Input frequency	10 MHz, 13 MHz, 15 MHz	
Input range	−5 to +5 dBm	
USB		
USB host ¹	Type A, 1 port	
USB client ²	Type B, 1 port	
SFP Cage		
Port 1	RfFiber (with option 008)	
Port 2	SFP/SFP+ compatible	
LAN	RJ45, 10/100Base-T	
Audio jack	3.5 mm headphone jack	
External power	5.5 mm barrel connector	
Speaker	Built-in speaker	
Display		
Type	Resistive touch screen	
Size	8 inch, LED backlight, transflective LCD with anti-glare coating	
Power		
External DC input	18 to 19 V DC	
Power consumption	42 W	54 W maximum (when charging battery)
Battery		
Type	10.8 V, 7800 mA/hr (Lithium ion)	
Operating time	>3 hr (typical at spectrum analyzer)	
Charge time	3 hr (while not operating) 9 hr (while operating)	
Charging temperature	0 to 45°C (32 to 104°F) ≤85% RH	
Discharging temperature	−20 to 55°C (4 to 131°F) ≤85% RH	
Storage temperature ³	0 to 25°C (32 to 77°F)	
Data Storage		
Internal ⁴	Maximum 512 MB	
External ⁵	Limited by size of USB flash drive	

Environmental		
Operating Temperature		
AC power	0 to 40°C (32 to 104°F) with no derating	
Battery	0 to 40°C (32 to 104°F) at charging –10 to 55°C (14 to 131°F) at discharging –10 to 50°C (14 to 122°F) at discharging with Option 008	
Maximum humidity	95% RH (noncondensing)	
Shock and vibration	MIL-PRF-28800F class 2	
Storage temperature ⁶	–30 to 71°C (–22 to 160°F)	
EMC		
IEC/EN 61326-1:2013 (complies with European EMC)		
CISPR11:2009 +A1:2010		
ESD		
IEC/EN 61000-4-2		
Size and Weight (standard configuration)		
Weight (with battery)	Standard	3.77 kg (8.31 lb)
	Full loaded	4.34 kg (9.57 lb)
Size (W x H x D)	295 x 195 x 82 mm	
Warranty		
3 years		
Calibration Cycle		
1 year		

1. Connects flash drive, power sensor, EZ-Cal kit, and fiber microscope.
2. Connects to PC for data transfer.
3. 20 to 85% RH, store battery pack in low-humidity environment; extended exposure to temperature above 45°C could significantly degrade battery performance and life.
4. Up to 3800 traces.
5. Supports USB 2.0 compatible memory devices.
6. With the battery pack removed.

Ordering Information

Description	Part Number
Standard CellAdvisor RF Analyzer	
RF analyzer includes: Spectrum analyzer 100 kHz to 4 GHz RF power meter 10 MHz to 4 GHz	JD748B ¹
Options NOTE: Upgrade options for the JD748B use the designation JD748BU before the respective last three-digit option number	
2 Port transmission measurements for JD748B ²	JD748B001
CW signal generator for JD748B ²	JD748B003
Signal Generator hardware for JD748B ³	JD748B007
Optical hardware for JD748B ⁴	JD748B008
20 MHz demodulation hardware for JD748B ⁵	JD748B009
GPS receiver and antenna for JD748B	JD748B010
Interference analyzer for JD748B ^{6,7}	JD748B011
Channel scanner for JD748B	JD748B012
Bluetooth connectivity for JD748B ⁸	JD748B013
LTE-FDD RAN performance indicator for JD748B ^{9,10}	JD748B014
LTE-TDD RAN performance indicator for JD748B ^{10,11}	JD748B015
Wi-Fi connectivity for JD748B ¹²	JD748B016
cdmaOne/cdma2000 analyzer for JD748B ¹⁰	JD748B020
EV-DO analyzer for JD748B ^{10,13}	JD748B021
GSM/GPRS/EDGE analyzer for JD748B ¹⁰	JD748B022
WCDMA/HSPA+ analyzer for JD748B ¹⁰	JD748B023
TD-SCDMA analyzer for JD748B ¹⁰	JD748B025
Mobile WiMAX analyzer for JD748B ¹⁰	JD748B026
LTE - FDD analyzer for JD748B ^{10,14}	JD748B028
LTE - TDD analyzer for JD748B ^{10,14}	JD748B029
LTE Advanced - FDD analyzer for JD748B ^{10,15,16}	JD748B030
LTE Advanced - TDD analyzer for JD748B ^{10,16,17}	JD748B031
LTE-FDD 256 QAM Demodulator for JD748B ^{10,18}	JD748B032
LTE-TDD 256 QAM Demodulator for JD748B ^{10,19}	JD748B033
cdmaOne/cdma2000 OTA analyzer for JD748B ^{10,20}	JD748B040
EV-DO OTA analyzer for JD748B ^{10,20}	JD748B041
GSM/GPRS/EDGE OTA analyzer for JD748B ^{10,20}	JD748B042
WCDMA/HSPA+ OTA analyzer for JD748B ^{10,20}	JD748B043
TD-SCDMA OTA analyzer for JD748B ^{10,20}	JD748B045
Mobile WiMAX OTA analyzer for JD748B ^{10,20}	JD748B046
LTE - FDD OTA analyzer for JD748B ^{10,20}	JD748B048
LTE - TDD OTA analyzer for JD748B ^{10,20}	JD748B049
EMF analyzer for JD748B ²¹	JD748B050
RFoCPRI 614M & 1.2G interference analyzer for JD748B ^{22,23}	JD748B060
RFoCPRI 2.4G interference analyzer for JD748B ^{22,23}	JD748B061
RFoCPRI 3.1G interference analyzer for JD748B ^{22,23}	JD748B062
RFoCPRI 4.9G interference analyzer for JD748B ^{22,23}	JD748B063
RFoCPRI 6.1G interference analyzer for JD748B ^{22,23}	JD748B064
RFoCPRI 9.8G interference analyzer for JD748B ^{22,23}	JD748B065
RFoBSAI 768M Interference analyzer for JD748B ^{22,23}	JD748B070
RFoBSAI 1.5G interference analyzer for JD748B ^{22,23}	JD748B071

Description	Part Number
RFoBSAI 3.1G interference analyzer for JD748B ^{22,23}	JD748B072
RFoBSAI 6.1G interference analyzer for JD748B ^{22,23}	JD748B073
RFoCPRI LTE-FDD signal generator for JD748B ^{22,23,24}	JD748B081
RFoCPRI LTE-TDD signal generator for JD748B ^{22,23,24}	JD748B082
RFoBSAI LTE-FDD signal generator for JD748B ^{22,23,25}	JD748B086
RFoCPRI LTE-FDD signal analyzer for JD748B ^{22,23,24}	JD748B091
RFoCPRI LTE-TDD signal analyzer for JD748B ^{22,23,24}	JD748B092
RFoBSAI LTE-FDD signal analyzer for JD748B ^{22,23,25}	JD748B096
ALU BBU emulation for JD748B ^{22,23}	JD748B101
2 port transmission measurements floating license for JD740B/JD780B	JD780B001-FL
GPS receiver and antenna floating license for JD740B/JD780B	JD780B010-FL
Interference analyzer floating license for JD740B/JD780B	JD780B011-FL
Channel scanner floating license for JD740B/JD780B	JD780B012-FL
Bluetooth connectivity floating license for JD740B/JD780B	JD780B013-FL
LTE-FDD RAN performance indicator floating license for JD740B/JD780B	JD780B014-FL
LTE-TDD RAN performance indicator floating license for JD740B/JD780B	JD780B015-FL
Wi-Fi connectivity floating license for JD740B/JD780B	JD780B016-FL
cdmaOne/cdma2000 analyzer floating license for JD740B/JD780B	JD780B020-FL
EV-DO analyzer floating license for JD740B/JD780B	JD780B021-FL
GSM/GPRS/EDGE analyzer floating license for JD740B/JD780B	JD780B022-FL
WCDMA/HSPA+ analyzer floating license for JD740B/JD780B	JD780B023-FL
TD-SCDMA analyzer floating license for JD740B/JD780B	JD780B025-FL
Mobile WiMAX analyzer floating license for JD740B/JD780B	JD780B026-FL
LTE - FDD analyzer floating license for JD740B/JD780B	JD780B028-FL
LTE - TDD analyzer floating license for JD740B/JD780B	JD780B029-FL
LTE Advanced - FDD analyzer floating license for JD740B/JD780B	JD780B030-FL
LTE Advanced - TDD analyzer floating license for JD740B/JD780B	JD780B031-FL
LTE-FDD 256 QAM Demodulator floating license for JD740B/JD780B	JD780B032-FL
LTE-TDD 256 QAM Demodulator floating license for JD740B/JD780B	JD780B033-FL
cdmaOne/cdma2000 OTA analyzer floating license for JD740B/JD780B	JD780B040-FL
EV-DO OTA analyzer floating license for JD740B/JD780B	JD780B041-FL

Ordering Information (Continued)

Description	Part Number
GSM/GPRS/EDGE OTA analyzer floating license for JD740B/JD780B	JD780B042-FL
WCDMA/HSPA+ OTA analyzer floating license for JD740B/JD780B	JD780B043-FL
TD-SCDMA OTA analyzer floating license for JD740B/JD780B	JD780B045-FL
Mobile WiMAX OTA analyzer floating license for JD740B/JD780B	JD780B046-FL
LTE - FDD OTA analyzer floating license for JD740B/JD780B	JD780B048-FL
LTE - TDD OTA analyzer floating license for JD740B/JD780B	JD780B049-FL
EMF analyzer floating license for JD740B/JD780B	JD780B050-FL
RFoCPRI 614M & 1.2G interference analyzer floating license for JD740B/JD780B	JD780B060-FL
RFoCPRI 2.4G interference analyzer floating license for JD740B/JD780B	JD780B061-FL
RFoCPRI 3.1G interference analyzer floating license for JD740B/JD780B	JD780B062-FL
RFoCPRI 4.9G interference analyzer floating license for JD740B/JD780B	JD780B063-FL
RFoCPRI 6.1G interference analyzer floating license for JD740B/JD780B	JD780B064-FL
RFoCPRI 9.8G interference analyzer floating license for JD740B/JD780B	JD780B065-FL
RFoOBSAI 768M interference analyzer floating license for JD740B/JD780B	JD780B070-FL
RFoOBSAI 1.5G interference analyzer floating license for JD740B/JD780B	JD780B071-FL
RFoOBSAI 3.1G interference analyzer floating license for JD740B/JD780B	JD780B072-FL
RFoOBSAI 6.1G interference analyzer floating license for JD740B/JD780B	JD780B073-FL
RFoCPRI LTE-FDD signal generator floating license for JD740B/JD780B	JD780B081-FL
RFoCPRI LTE-TDD signal generator floating license for JD740B/JD780B	JD780B082-FL
RFoOBSAI LTE-FDD signal generator floating license for JD740B/JD780B	JD780B086-FL
RFoCPRI LTE-FDD signal analyzer floating license for JD740B/JD780B	JD780B091-FL
RFoCPRI LTE-TDD signal analyzer floating license for JD740B/JD780B	JD780B092-FL
RFoOBSAI LTE-FDD signal analyzer floating license for JD740B/JD780B	JD780B096-FL
ALU BBU emulation floating license for JD740B/JD780B	JD780B101-FL
Optional Accessories	
Accessory - RF Cables (Cables)	
RF cable DC to 8 GHz Type-N(m) to Type-N(m), 1.0 m	G700050530
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 1.5 m	G700050531
RF cable DC to 8 GHz Type-N(m) to Type-N(f), 3.0 m	G700050532

Description	Part Number
RF cable DC to 18 GHz Type-N(m) to SMA(m), 1.5 m	G710050533
RF cable DC to 18 GHz Type-N(m) to QMA(m), 1.5 m	G710050534
RF cable DC to 18 GHz Type-N(m) to SMB(m), 1.5 m	G710050535
RF cable DC to 6 GHz Type-N(m) to DIN(f), 1.5 m	G710050536
RF cable DC to 4 GHz Type-N(m) to 1.0/2.3 (m), 1.5 m	G710050537
RF cable DC to 18 GHz Type-N(m) to Type-N(f), 1.5 m	G710050531
Accessory - Optic Cables (Cables)	
SM/LC T-Jumper and 1.5 m fiber cable ²⁶	G700050401
MM/LC T-Jumper and 1.5 m fiber cable ²⁶	G700050402
Accessory - RF Antennas (General)	
RF omni antenna Type-N(m), 806 to 896 MHz ²⁷	G700050353
RF omni antenna Type-N(m), 870 to 960 MHz ²⁷	G700050354
RF omni antenna Type-N(m), 1710 to 2170 MHz ²⁷	G700050355
RF omni antenna Type-N(m), 720 to 800 MHz ²⁷	G700050356
RF omni antenna Type-N(m), 2300 to 2700 MHz ²⁷	G700050357
Mag mount RF omni antenna Type-N(m), 689 to 1200 MHz, 1700 to 2700 MHz, 3000 to 6000 MHz ²⁷	G700050358
RF yagi antenna Type-N(f), 1750 to 2390 MHz, 10.2 dBd ^{27,28}	G700050363
RF yagi antenna Type-N(f), 806 to 896 MHz, 10.2 dBd ^{27,28}	G700050364
RF yagi antenna Type-N(f), 866 to 960 MHz, 9.8 dBd ^{27,28}	G700050365
RF yagi antenna SMA(f), 700 to 4000 MHz, 1.85 dBd ^{27,28}	G700050366
RF yagi antenna SMA(f), 700 to 6000 MHz, 2.85 dBd ^{27,28}	G700050367
Isotropic Antenna Type-N(m), 26 MHz to 3 GHz ²⁹	G700050380
Accessory - RF Power Sensor (General)	
Directional power sensor (peak and average power) 300 to 3800 MHz	JD731B
Terminating power sensor (Average Power) 20 to 3800 MHz	JD732B
Directional power sensor (peak and average power) 150 to 3500 MHz	JD733A
Terminating power sensor (peak power) 20 to 3800 MHz	JD734B
Terminating power sensor (average/peak power) 20 to 3800 MHz	JD736B
Accessory - RF Adapters (Connector & Adapters)	
Adapter Type-N(m) to DIN(f), DC to 7.5 GHz, 50 ohm	G700050571
Adapter DIN(m) to DIN(m), DC to 7.5 GHz, 50 ohm	G700050572
Adapter Type-N(m) to SMA(f) DC to 18 GHz, 50 ohm	G700050573
Adapter Type-N(m) to BNC(f), DC to 4 GHz, 50 ohm	G700050574
Adapter Type-N(f) to Type-N(f), DC to 18 GHz 50 ohm	G700050575
Adapter Type-N(m) to DIN(m), DC to 7.5 GHz, 50 ohm	G700050576
Adapter Type-N(f) to DIN(f), DC to 7.5 GHz, 50 ohm	G700050577
Adapter Type-N(f) to DIN(m), DC to 7.5 GHz, 50 ohm	G700050578
Adapter DIN(f) to DIN(f), DC to 7.5 GHz, 50 ohm	G700050579

Ordering Information (Continued)

Description	Part Number
Adapter Type-N(m) to Type-N(m), DC to 11 GHz 50 ohm	G700050580
Adapter N(m) to QMA(f), DC to 6.0 GHz, 50 ohm	G700050581
Adapter N(m) to QMA(m), DC to 6.0 GHz, 50 ohm	G700050582
Adapter N(m) to 4.1/9.5 MINI DIN (f), DC to 6.0 GHz, 50 ohm	G700050583
Adapter N(m) to 4.1/9.5 MINI DIN (m), DC to 6.0 GHz, 50 ohm	G700050584
Adapter N(m) to 4.3-10 (f), DC to 6.0 GHz, 50 ohm	G700050585
Adapter N(m) to 4.3-10 (m), DC to 6.0 GHz, 50 ohm	G700050586
Adapter N(f) to N(f), DC to 4 GHz, 50 ohm	G710050575
Adapter Type-N(f) to DIN(f), DC to 4 GHz, 50 ohm	G710050577
Adapter Type-N(f) to DIN(m), DC to 7 GHz, 50 ohm	G710050578
Accessory - RF Miscellaneous (General)	
Attenuator 40 dB, 100 W, DC to 4 GHz (unidirectional)	G710050581
RF directional coupler, 700 to 4000 MHz, 30 dB, 50 W Input/output; Type-N(m) to Type-N(f), tap off; Type-N(f) ³⁰	G710050585
RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ³⁰	G710050586
4x1 RF combiner, 700 to 4000 MHz, Type-N(f) to Type-N(m) ³¹	G710050587
Bandpass filter 696 MHz to 716 MHz, N(m) to N(f), 50 ohm	G700050601
Bandpass filter 776 MHz to 788 MHz, N(m) to N(f), 50 ohm	G700050602
Bandpass filter 806 MHz to 849 MHz, N(m) to N(f), 50 ohm	G700050603
Bandpass filter 1710 MHz to 1755 MHz, N(m) to N(f), 50 ohm	G700050604
Bandpass filter 1850 MHz to 1910 MHz, N(m) to N(f), 50 ohm	G700050605
Accessory - General	
USB Bluetooth dongle and dipole antenna 5 dBi	JD70050006
GPS antenna for JD740 and JD780 series	JD71050351
AntennaAdvisor handle ³²	JD70050007
Cross LAN cable (6ft)	G700550335
USB A to B cable (1.8m)	GC73050515
> 1GB USB memory	GC72450518
Stylus pen	G710550316
Accessory - Battery & Chargers	
Rechargeable lithium ion battery	G710550325
JD700B series AC/DC power adapter_90 W_15 V	JD70050326
Automotive cigarette lighter/12V DC adapter	G710550323
External battery charger	G710550324
Accessory - Manual & Documentation	
JD700B series user's guide - printed version	JD700B362
Accessory - Carrying Case	
Soft carrying case	JD74050341
Hard carrying Case	JD71050342

Description	Part Number
Hard carrying case with wheels	JD70050342
CellAdvisor backpack carrying case	JD70050343
Optional TAP	
Optical nTAP, three-channel, 50 µm, MM, LC, 50/50 split ratio	TO3-M5-LC-55-K
Optical nTAP, three-channel, 9 µm, SM, LC, 50/50 split ratio	TO3-SM-LC-55-K
Optional SFP Transceiver	
SFP 4G/2G/1G Fibre Channel & 1G Ethernet, 850nm, 150-500m, SX ³⁰	CSFP-4G-8-1
SFP 4G/ 2G/ 1G Fibre Channel & 1G Ethernet, 1310nm, 5km, LX ³⁰	CSFP-4G-3-1
SFP 4G/2G/1G Fibre Channel & 1G Ethernet, 1310nm, 20km, LX ³⁰	CSFP-4G-3-2
SFP+ 8G/4G/2G Fibre Channel, 6G/4.9G CPRI 850 nm MM Multirate ³¹	CSFPPLUS-8G-8-1
SFP+ 8G/4G/2G Fibre Channel, 6G/4.9G CPRI 1310nm SM, 10km ³¹	CSFPPLUS-8G-3-1
SFP+ 1G/10G Ethernet, 1G/10G Fiber Channel & 9.8G CPRI, 850nm, MM, 300m ³²	SFPPLUS-1GE-10GE-8-1
SFP+ 1G/10G Ethernet, 1G/10G Fiber Channel & 9.8G CPRI, 1310nm, SM, 10km ³²	SFPPLUS-1GE-10GE-3-1
Optional StrataSync™	
StrataSync for CellAdvisor SA - Asset Management-1 Yr	SS-CA-SA-AM-01
StrataSync for CellAdvisor SA - Asset Management-2 Yr	SS-CA-SA-AM-02
StrataSync for CellAdvisor SA - Asset Management-3 Yr	SS-CA-SA-AM-03
StrataSync for CellAdvisor SA - Test Data Management-1 Yr	SS-CA-SA-TDM-01
StrataSync for CellAdvisor SA - Test Data Management-2 Yr	SS-CA-SA-TDM-02
StrataSync for CellAdvisor SA - Test Data Management-3 Yr	SS-CA-SA-TDM-03
Optical Power Meters and Fiber Microscope Kits	
USB optical power meter with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-60A
USB optical power meter — high power, with software, 2.5 and 1.25 mm interfaces, 30-inch USB extender, and carrying pouch	MP-80A
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and four tips	FBP-SD101
KIT: FBP-P5000i digital probe, FiberChekPRO software, case, and seven tips	FBP-MTS-101
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD103
KIT: FBP-P5000i digital probe, MP-60A USB power meter, FiberChekPRO software, case, tips, adapters, and cleaning materials	FIT-SD103-C
KIT: FBP-P5000i digital probe, MP-80A USB power meter, FiberChekPRO software, case, tips, and adapters	FIT-SD113

1. Supplied accessories: User's Guide, USB Memory (1GB), Cross LAN Cable, USB Cable, DC car adapter, Li-Ion Battery, AC/DC adapter, Stylus Pen
2. Highly recommended using the Calibration Kit (JD78050509, JD78050510, JD70050509)
3. Highly recommended using the Calibration Kit (JD78050507, JD78050508) and Bias Tee (option 002)
4. Requires option 001
5. Needs for RFoFIBER options 060,061,062,063,064,065,070,071,072,073,081,091,092,096,101
6. Needs Omni or Yagi antenna
7. Highly recommended adding option 010
8. Includes a Bluetooth USB dongles with 5 dBi dipole antennas (JD70050006)
9. Requires option 013 and option 028 and Needs TrueSite(FTA)
10. Requires option 013 and option 029 and Needs TrueSite(FTA)
11. Includes a Wi-Fi USB dongle
12. Requires option 020
13. Highly recommended using the RF Directional Coupler or RF combiner (G710050585 or G710050586)
14. Requires option 028
15. Highly recommended using the 4x1 RF combiner (G710050587)
16. Requires option 029
17. Requires option 030
18. Requires option 031
19. Requires option 010
20. Requires G700050380
21. Requires option 008, Including Layer2 Term and Monitoring
22. Needs proper SFP/SFP+ Transceiver and Optical Tap or thur mode fiber cable (G700050401 or G700050402)
23. Requires at least one of RFoCPRI Interference Analyzer options (option 060 to 065), needs each of the respective/corresponding Interference Analyzer line rate
24. Requires at least one of RFoOBSAI Interference Analyzer options (option 070 to 073), needs each of the respective/corresponding Interference Analyzer line rate
25. Includes G700050358, Android Tablet (Galaxy Tab S2), Car Mount Kit, 1x2 USB Hub, Accessory Soft carrying case
26. Needs for RFoFIBER measurements (060,061,062,063,064,065,070,071,072,073,081,091,092,096,101)
27. Needs for OTA/Interference measurements (options 011/040, 041, 042, 043, 044, 045, 046, 048, 049)
28. Needs Proper RF Cables for the inter-connection
29. Needs option 050
30. Needs for LTE measurement (option 028, 029)
31. Needs for LTE-A measurement (option 030, 031)
32. Needs G700050366 or G700050367



Contact Us **+1 844 GO VIAVI**
(+1 844 468 4284)

To reach the Viavi office nearest you,
visit viavisolutions.com/contacts.

© 2015 Viavi Solutions Inc.
Product specifications and descriptions in this
document are subject to change without notice.
jd748bsaspec-ds-nsd-nse-ae
30176036 901 0616